



# CCTV COAXIAL CABLES | Outdoor

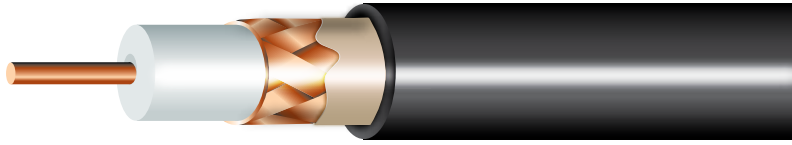

TYPE	SHIELD	PART NO.	AWG	NOMINAL OD (INCH)		JACKET TYPE	SHIP WT / 1M'
				CORE	CABLE		
RG 59	WB Tape + 95% BC	4-4593WB	20 BC	.140	.240	DBPVC	36
	95% BC	4593APE	20 BC	.140	.240	PE	30
	WB Tape + 95% TC	2159WB	20 BC	.140	.238	DBPVC	36
RG 6	WB Tape + 95% BC	4-4006WB	18 BC	.180	.288	DBPVC	43
	95% BC	4006APE	18 BC	.180	.270	PE	37
	95% BC + WB Gel	4006AFPE	18 BC	.180	.270	PE	37
RG 11	95% BC	4011PE	14 BC	.280	.405	PE	76
	95% BC + WB Gel	4011FPE	14 BC	.280	.405	PE	77

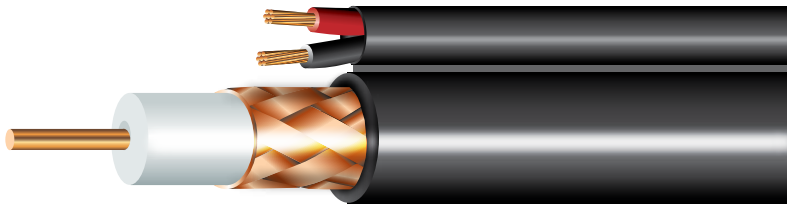

## SIAMESE

TYPE	SHIELD	PART NO.	AWG	NOMINAL OD (INCH)		NEC TYPE	SHIP WT / 1M'
				CORE	CABLE		
RG 59	95% BC + 18/2 BC	9912DB	20 BC	.140	.237 x .427	DBPVC	56
RG 6	95% BC	9908WB	18 BC + 16/2 BC	.180	.237 x .427	CM	68

The information contained on this specification is intended to be used as a guide and every effort has been made to ensure its accuracy at time of publication. This specification is subject to change anytime without notice. Please refer to [www.adcable.com](http://www.adcable.com) for the most up to date information. Rev 0419

### PRODUCT DESCRIPTION

Foamed dielectric core over solid copper conductor, copper braid shield, overall black jacket\*.

### APPLICATIONS

- Audio/Video

### SPECIFICATIONS

**Nominal Impedance** 75 Ohm  
**Nominal Velocity of Propagation** 84  
**Nominal Capacitance** 16.2  
**Temp. Rating** -39°C to +75°C  
 Direct Burial  
**Attenuation** see chart on page 47  
 (RG6 & RG11 are 3GHz swept tested)

### AVAILABLE PUT-UPS

1,000' Reels and Boxes  
 500' Reels and Boxes  
 Other lengths available. Please consult your factory representative for availability.

### CABLE IDENTIFICATION

RG X CCTV XX AWG YYYY

**Siamese Print:**

1C/XX AWG RG X 2C/18 AWG

\*Other colors available upon request. Please consult factory for minimums and lead times.



(800) 343 2579 • [www.adcable.com](http://www.adcable.com)