


LANDSCAPE CABLE

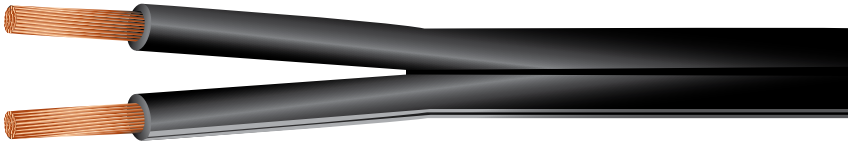

AWG	COND	STRAND	PART NO.	OUTER JKT THICKNESS		NOMINAL OD		SHIP WT / 1M'
				INCH	mm			
14	2	41/30	4414	.045	1.14	.165 x .340		54
12	2	65/30	4412	.045	1.14	.190 x .345		76
10	2	104/30	4410	.045	1.14	.208 x .440		108
8	2	133/29	4408	.060	1.52	.282 x .590		125

The information contained on this specification is intended to be used as a guide and every effort has been made to ensure its accuracy at time of publication. This specification is subject to change anytime without notice. Please refer to www.adcable.com for the most up to date information. Rev 0419

PRODUCT DESCRIPTION

Stranded Bare Copper conductors, black PVC jacket in flat parallel construction, polarity identified by surface ridges.

APPLICATIONS

- Indoor/Outdoor
- Above/Below Ground
- Landscape Lighting Systems
- Low Voltage Accent Lighting
- Security Systems

SPECIFICATIONS

Conductor Stranded Bare Copper

Jacket PVC

Voltage Rating 150 V

Temp. Rating 60°C

COLOR CODE CHART

Conductors are all black

Polarity Identified by Surface Ridges

AVAILABLE PUT-UPS

1,000' Reels and Boxes

500' Reels and Boxes

Other lengths available. Please consult your factory representative for availability.

CABLE IDENTIFICATION

XX AWG 2C LOW VOLTAGE-
LANDSCAPE LIGHTING CABLE