


# TRAILER CABLE

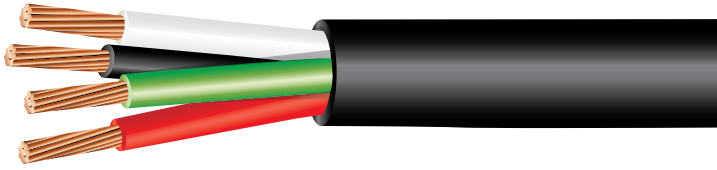

## RoHS Compliant

Part Number	AWG	Conductor		Insulation Thickness (mils)	Nominal O.D. (inch)	Weight, Lbs. / 1000 ft.
		# Cond.	Strand			
TRC164	16	4	19/29	.023	.305	60
TRC166	16	6	19/29	.023	.440	150
TRC144	14	4	19/27	.023	.420	150
TRC146	14	6	19/27	.023	.490	190
TRC147	14	7	19/27	.023	.535	220
TRC124	12	4	19/25	.026	.510	250
TRC126	12	6	19/25	.026	.560	320
TRC141210	14,12,10	4,1,2	19/27, 19/25, 19/23	.023, .026, .031	.579	256
TRC1210	12,10	6,1	19/25, 19/23	.026, .031	.600	350
TRC12108	12,10,8	4,2,1	19/25, 19/23, 19/21	.026, .031, .037	.710	420
TRC163	16	3	19/29	.023	.280	47

## PRODUCT DESCRIPTION

Round-jacketed cable of bare copper wire, stranded, with PVC insulation.

## CONSTRUCTION

Conductor: 4, 6, or 7 Conductors; Bare copper, Stranded, 16 AWG to 12 AWG

Insulation: Polyvinyl Chloride

Jacket: Round, Polyvinyl Chloride

## Jacket Thickness:

TRC164	.030"
TRC166	.030"
TRC144	.045"
TRC146	.060"
TRC147	.060"
TRC124	.070"
TRC126	.070"
TRC141210	.070"
TRC1210	.070"
TRC12108	.070"

## APPLICATIONS

For applications where oil and weather resistance are required including trailers and trucks.

## INDUSTRY LISTINGS & STANDARDS

Temperature Range: -35°C to +90°C

## INSULATION COLORS

(1) Red, (2) White, (3) Black, (4) Green, (5) Yellow, (6) Blue

## JACKET COLORS

Black, Brown, Red, Orange, Yellow, Green, Blue, Purple, Grey, White

## AVAILABLE PUT-UPS

Reels: 500, 1000, 2500, 5000, 10000 feet

Custom Put-ups available upon request

## CABLE IDENTIFICATION

ADVANCED DIGITAL CABLE, INC. xx AWG TRAILER CABLE 80C 50V



The information contained on this specification is intended to be used as a guide in product selection and is believed to be reliable. ADC has made every effort to ensure the data shown above is accurate at the time of publication. This specification is subject to change anytime without notice. Rev HU0618

PHONE: (800) 343 2579 • FAX: (828) 389 3922 • WWW.ADCABLE.COM