



CCTV COAXIAL CABLES | PVC

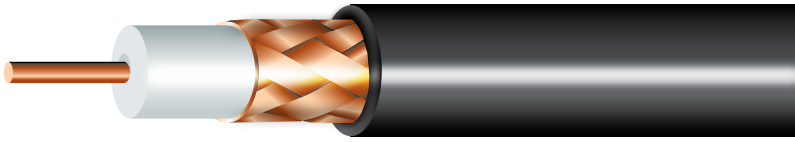

TYPE	SHIELD	PART NO.	AWG	NOMINAL OD (INCH)		NEC TYPE	SHIP WT / 1M'
				CORE	CABLE		
RG 59	95% BC	4-4593A	20 BC	.145	.240	CM	33
	95% CCA	4-4593CA	20 BC	.145	.240	CM	29
	95% TC AL Tape	2159R	20 BC	.140	.238	CMR	34
RG 6	95% BC	4-4006A	18 BC	.178	.270	CM	43
	95% TC Foil	2106R	18 BC	.178	.270	CMR	41
RG 11	95% BC	4-4011	14 BC	.280	.400	CM	85

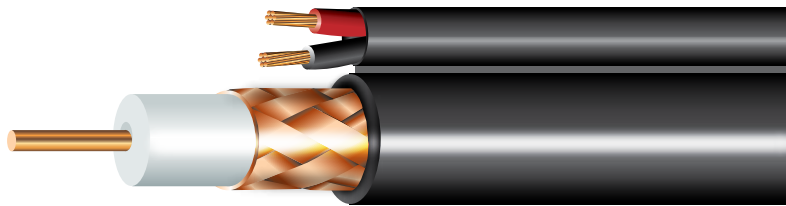

SIAMESE



TYPE	SHIELD	PART NO.	AWG	NOMINAL OD (INCH)		NEC TYPE	SHIP WT / 1M'
				CORE	CABLE		
Siamese	95% BC	9912	20 BC + 18/2 BC	.145	.237 x .427	CM	55
	95% CCA	9912CA	20 BC + 18/2 BC	.145	.237 x .427	CM	51
	95% BC	9913	20 BC + 18/2 BC	.145	.237 x .427	CM	58
	95% BC	9906	18 BC + 18/2 BC	.178	.269 x .481	CM	66

The information contained on this specification is intended to be used as a guide and every effort has been made to ensure its accuracy at time of publication. This specification is subject to change anytime without notice. Please refer to www.adcable.com for the most up to date information. Rev 0419

PRODUCT DESCRIPTION

Foamed dielectric core over solid/stranded copper center conductor. Copper or copper covered aluminum braid shield, overall black PVC jacket*.

APPLICATIONS

- Audio/Video
- CCTV Transmission

SPECIFICATIONS

Nominal Impedance 75 Ohm
Nominal Velocity of Propagation 82
Nominal Capacitance 16.2
NEC Articles: CM, CL2 Riser
Temp. Rating -25°C to +75°C
 Sunlight Resistant
Attenuation see chart on page 47
 (RG6 & RG11 are 3GHz swept tested)

AVAILABLE PUT-UPS

1,000' Reels and Boxes
 500' Reels and Boxes
 Other lengths available. Please consult your factory representative for availability.

CABLE IDENTIFICATION

RG X XX AWG c(UL)us TYPE CM E179333

Siamese Print:
 1C/XX AWG RG X 2C/18 AWG
 c(UL)us TYPE CM E179333

*Other colors available upon request. Please consult factory for minimums and lead times.
 *Riser rated FT4 available upon request



(800) 343 2579 • www.adcable.com